

VUEPIX LCD

PRODUCT GUIDE 2018


BESPOKE LCD SOLUTIONS

VuePix LCD Displays can be custom designed to suit almost any specific technical or aesthetic requirement.

- Wall Mount or Free-Standing
- Indoor or Outdoor models
- Wide range of display sizes
- Single or double sided
(free standing models)
- Landscape or portrait
(wall mount models)
- Custom exterior styling
- Custom media player



REAL-TIME MONITORING

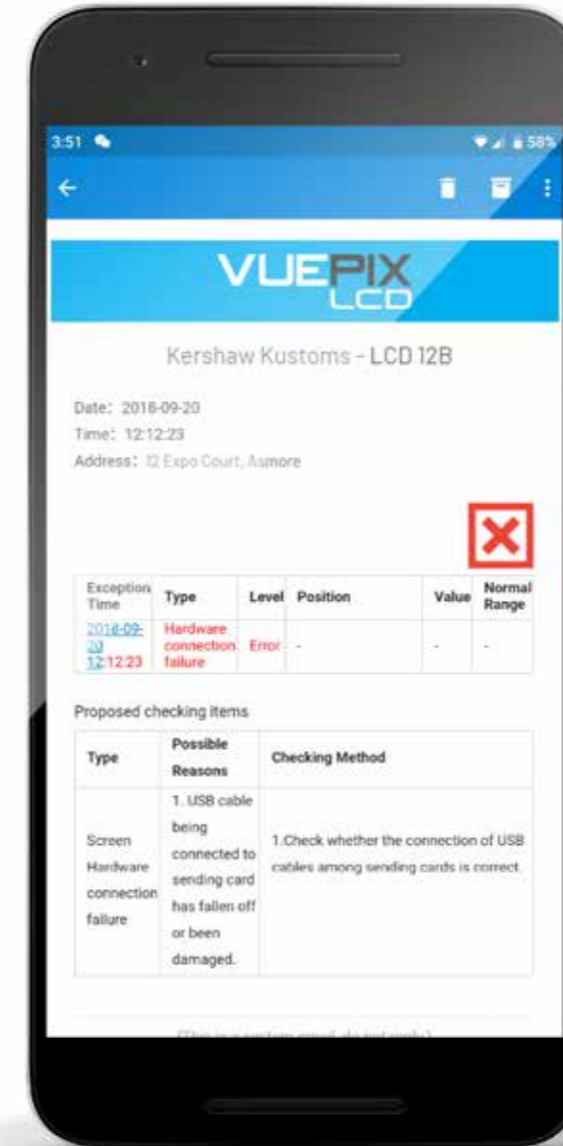

Keep track of your LCD displays with real time monitoring to ensure flawless operation at all times.

LCD PANEL STATUS

Be alerted to any unscheduled downtime of your LCD Panel

VIDEO SIGNAL STATUS

Monitor the video data feed to ensure a seamless message is displayed at all times.

TEMPERATURE SENSOR

Keep track of the ambient temperature of the unit to ensure performance is at peak level, especially during extreme weather events.

Future release to include cloud based monitoring, location overlay, detailed log reports, and advanced notifications.

OUTDOOR FREE STANDING LCD KIOSK



FEATURES

Ambient Light Sensor

The display is equipped with a light sensor that detects the ambient light, and adjusts the brightness of the screens to the optimum viewing brightness.

Anti-Reflective Glass

Anti-reflective glass diffuses direct sunlight to provide an uninterrupted viewing experience. Tempered security glass is installed for added protection to combat against any vandalism. The UV treatment on the glass also extends the longevity of the face of the LCD panel.

Dust Tight

The screen has the highest intrusion protection rating of IP65, meaning it is virtually impossible for dust to enter the enclosure.

Ultra-High Brightness Panel

With a peak brightness of 3000nits, the displays produce a perfect image in all conditions.

Advanced Temperature Control

Designed to run 24/7 the intelligent temperature control system regulates and protects the LCD screen, ensuring the performance of the display is at a peak level.

Weather Proof

Rated IP65 to ensure perfect performance in any weather condition.

Internal Locker

Secure internal locker for storage of external devices connected via HDMI and USB.

Toughened Glass

Thermally toughened glass protects the screens internal components and adds an extra layer of security against external elements.

Modifications

The screens can be upgraded in various ways including the addition of a camera, 4G module, customised colours, finishes, media players etc.

Sturdy Enclosure

The enclosure is built from high quality materials to an exacting standard, and provides the internal components protection from any external threats.

	Display Size	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	85 Inch
Panel	Resolution	1080x1920			2160x3840		
	Frame	Powder Coated Steel Frame / Heat Treated Glass / Custom Colours and Finishes Available					
	Display Area (mm)	643 x 500	943 x 531	1210 x 680	1428 x 803	1600 x 900	1860 x 1046
	Aspect Ratio	9:16					
	Brightness (nits)	3000					
	Color	1.06 Billion			1.073 Billion		
	Viewing Angle	178°					
	Contrast Ratio	4000:1					
	AV Inputs	Video	HDMI, USB				
	Inputs	Power Consumption (W)	≤ 800			≤ 1000	
Input Voltage		AC110-240V (50Hz-60Hz)					
Mechanical	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1246x256x2350	1248x380x2057
	Net Weight (kg)	120	140	160	205	250	290
Environmental	Operating Temperature:	-20° - 60°					
	Operating Humidity:	10% - 80%					
	Storage Humidity:	5% - 90%					
	Enclosure Protection	IP65					
Internal Media Player	Operating System	Customisable					
Accessories	Included	AC Power Cable, Remote Control					
	Optional	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor					

Specifications and design are subject to change without notice.

INDOOR FREE STANDING LCD KIOSK



FEATURES

Ambient Light Sensor

The display is equipped with a light sensor that detects the ambient light, and adjusts the brightness of the screens to the optimum viewing brightness.

Anti-Reflective Glass

Anti-reflective glass diffuses direct sunlight to provide an uninterrupted viewing experience. Tempered security glass is installed for added protection to combat against any vandalism. The UV treatment on the glass also extends the longevity of the face of the LCD panel.

Internal Locker

Secure internal locker for storage of external devices connected via HDMI and USB.

Ultra-High Brightness Panel

With a peak brightness of 1000nits, the displays produce a perfect image in all conditions.

Sturdy Enclosure

The enclosure is built from high quality materials to an exacting standard, and provides the internal components protection from any external threats.

Advanced Temperature Control

Designed to run 24/7 the intelligent temperature control system regulates and protects the LCD screen, ensuring the performance of the display is at a peak level.

Modifications

The screens can be upgraded in various ways including the addition of a camera, 4G module, customised colours, finishes, media players etc.

Toughened Glass

Thermally toughened glass protects the screens internal components and adds an extra layer of security against external elements.

	Display Size	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	85 Inch
Panel	Resolution	1080x1920			2160x3840		
	Frame	Powder Coated Steel Frame / Heat Treated Glass / Custom Colours and Finishes Available					
	Display Area (mm)	643 x 500	943 x 531	1210 x 680	1428 x 803	1600 x 900	1860 x 1046
	Aspect Ratio	9:16					
	Brightness (nits)	300-1000					
	Color	1.06 Billion			1.073 Billion		
	Viewing Angle	178°					
	Contrast Ratio	4000:1					
	AV Inputs	Video	HDMI, USB				
Inputs	Power Consumption (W)	≤ 800			≤ 1000		
	Input Voltage	AC110-240V (50Hz-60Hz)					
Mechanical	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1246x256x2350	1248x380x2057
	Net Weight (kg)	120	140	160	205	250	290
Environmental	Operating Temperature:	-20° - 60°					
	Operating Humidity:	10% - 80%					
	Storage Humidity:	5% - 90%					
	Enclosure Protection	IP30					
Internal Media Player	Operating System	Customisable					
Accessories	Included	AC Power Cable, Remote Control					
	Optional	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor					

Specifications and design are subject to change without notice.

OUTDOOR WALL-MOUNT LCD DISPLAY



FEATURES

Ambient Light Sensor

The display is equipped with a light sensor that detects the ambient light, and adjusts the brightness of the screens to the optimum viewing brightness.

Anti-Reflective Glass

Anti-reflective glass diffuses direct sunlight to provide an uninterrupted viewing experience. Tempered security glass is installed for added protection to combat against any vandalism. The UV treatment on the glass also extends the longevity of the face of the LCD panel.

Dust Tight

The screen has the highest intrusion protection rating of IP65, meaning it is virtually impossible for dust to enter the enclosure.

Ultra-High Brightness Panel

With a peak brightness of 3000nits, the displays produce a perfect image in all conditions.

Advanced Temperature Control

Designed to run 24/7 the intelligent temperature control system regulates and protects the LCD screen, ensuring the performance of the display is at a peak level.

Weather Proof

Rated IP65 to ensure perfect performance in any weather condition.

Internal Locker

Secure internal locker for storage of external devices connected via HDMI and USB.

Toughened Glass

Thermally toughened glass protects the screens internal components and adds an extra layer of security against external elements.

Modifications

The screens can be upgraded in various ways including the addition of a camera, 4G module, customised colours, finishes, media players etc.

Sturdy Enclosure

The enclosure is built from high quality materials to an exacting standard, and provides the internal components protection from any external threats.

	Display Size	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	85 Inch
Panel	Resolution	1080x1920			2160x3840		
	Frame	Powder Coated Steel Frame / Heat Treated Glass / Custom Colours and Finishes Available					
	Display Area (mm)	643 x500	943 x 531	1210x680	1428x803	1600x900	1860x1046
	Aspect Ratio	9:16					
	Brightness (nits)	3000					
	Color	1.06 Billion			1.073 Billion		
	Viewing Angle	178°					
	Contrast Ratio	4000:1					
	AV Inputs	Video	HDMI, USB				
Inputs	Power Consumption (W)	≤ 800			≤ 1000		
	Input Voltage	AC110-240V (50Hz-60Hz)					
Mechanical	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1100x410x2000	1248x380x2057
	Net Weight (kg)	176	220	300	350	380	420
Environmental	Operating Temperature:	-20° - 60°					
	Operating Humidity:	10% - 80%					
	Storage Humidity:	5% - 90%					
	Enclosure Protection	IP65					
Internal Media Player	Operating System	Customisable					
Accessories	Included	AC Power Cable, Remote Control					
	Optional	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor					

Specifications and design are subject to change without notice.

INDOOR WALL-MOUNT LCD DISPLAY



FEATURES

Ambient Light Sensor

The display is equipped with a light sensor that detects the ambient light, and adjusts the brightness of the screens to the optimum viewing brightness.

Anti-Reflective Glass

Anti-reflective glass diffuses direct sunlight to provide an uninterrupted viewing experience. Tempered security glass is installed for added protection to combat against any vandalism. The UV treatment on the glass also extends the longevity of the face of the LCD panel.

Internal Locker

Secure internal locker for storage of external devices connected via HDMI and USB.

Ultra-High Brightness Panel

With a peak brightness of 1000nits, the displays produce a perfect image in all conditions.

Sturdy Enclosure

The enclosure is built from high quality materials to an exacting standard, and provides the internal components protection from any external threats.

Advanced Temperature Control

Designed to run 24/7 the intelligent temperature control system regulates and protects the LCD screen, ensuring the performance of the display is at a peak level.

Modifications

The screens can be upgraded in various ways including the addition of a camera, 4G module, customised colours, finishes, media players etc.

Toughened Glass

Thermally toughened glass protects the screens internal components and adds an extra layer of security against external elements.

	Display Size	32 Inch	43 Inch	55 Inch	65 Inch	75 Inch	85 Inch
Panel	Resolution	1080x1920		2160x3840			
	Frame	Powder Coated Steel Frame / Heat Treated Glass / Custom Colours and Finishes Available					
	Display Area (mm)	643 x 500	943 x 531	1210 x 680	1428 x 803	1600 x 900	1860 x 1046
	Aspect Ratio	9:16					
	Brightness (nits)	300-1000					
	Color	1.06 Billion			1.073 Billion		
	Viewing Angle	178°					
	Contrast Ratio	4000:1					
	AV Inputs	Video	HDMI, USB				
Inputs	Power Consumption (W)	≤ 800			≤ 1000		
	Input Voltage	AC110-240V (50Hz-60Hz)					
Mechanical	Unit Size (LxWxH)	600x180x1700	800x232x1800	904x272x1940	1000x390x1980	1100x410x2000	1248x380x2057
	Net Weight (kg)	176	220	300	350	380	420
Environmental	Operating Temperature:	-20° - 60°					
	Operating Humidity:	10% - 80%					
	Storage Humidity:	5% - 90%					
	Enclosure Protection	IP30					
Internal Media Player	Operating System	Customisable					
Accessories	Included	AC Power Cable, Remote Control					
	Optional	Touch Screen Upgrade, Network Upgrade, Camera, Speakers, Dynamic Cooling System, Automatic Brightness Sensor					

Specifications and design are subject to change without notice.



VUEPIX LCD

VUEPIX
LCD

WWW.VUEPIX.TV

VuePix® is continuously developing and improving all its products. We reserve the right to change specifications without prior notification. Images are representing but not necessarily a precise product reference. VuePix® shall be under no liability for any loss, damage or injury for direct or indirect dependence on the information contained in this catalogue. September 2018.